


Reflectance Curves for Standard Metal Coatings @ 45° AOI

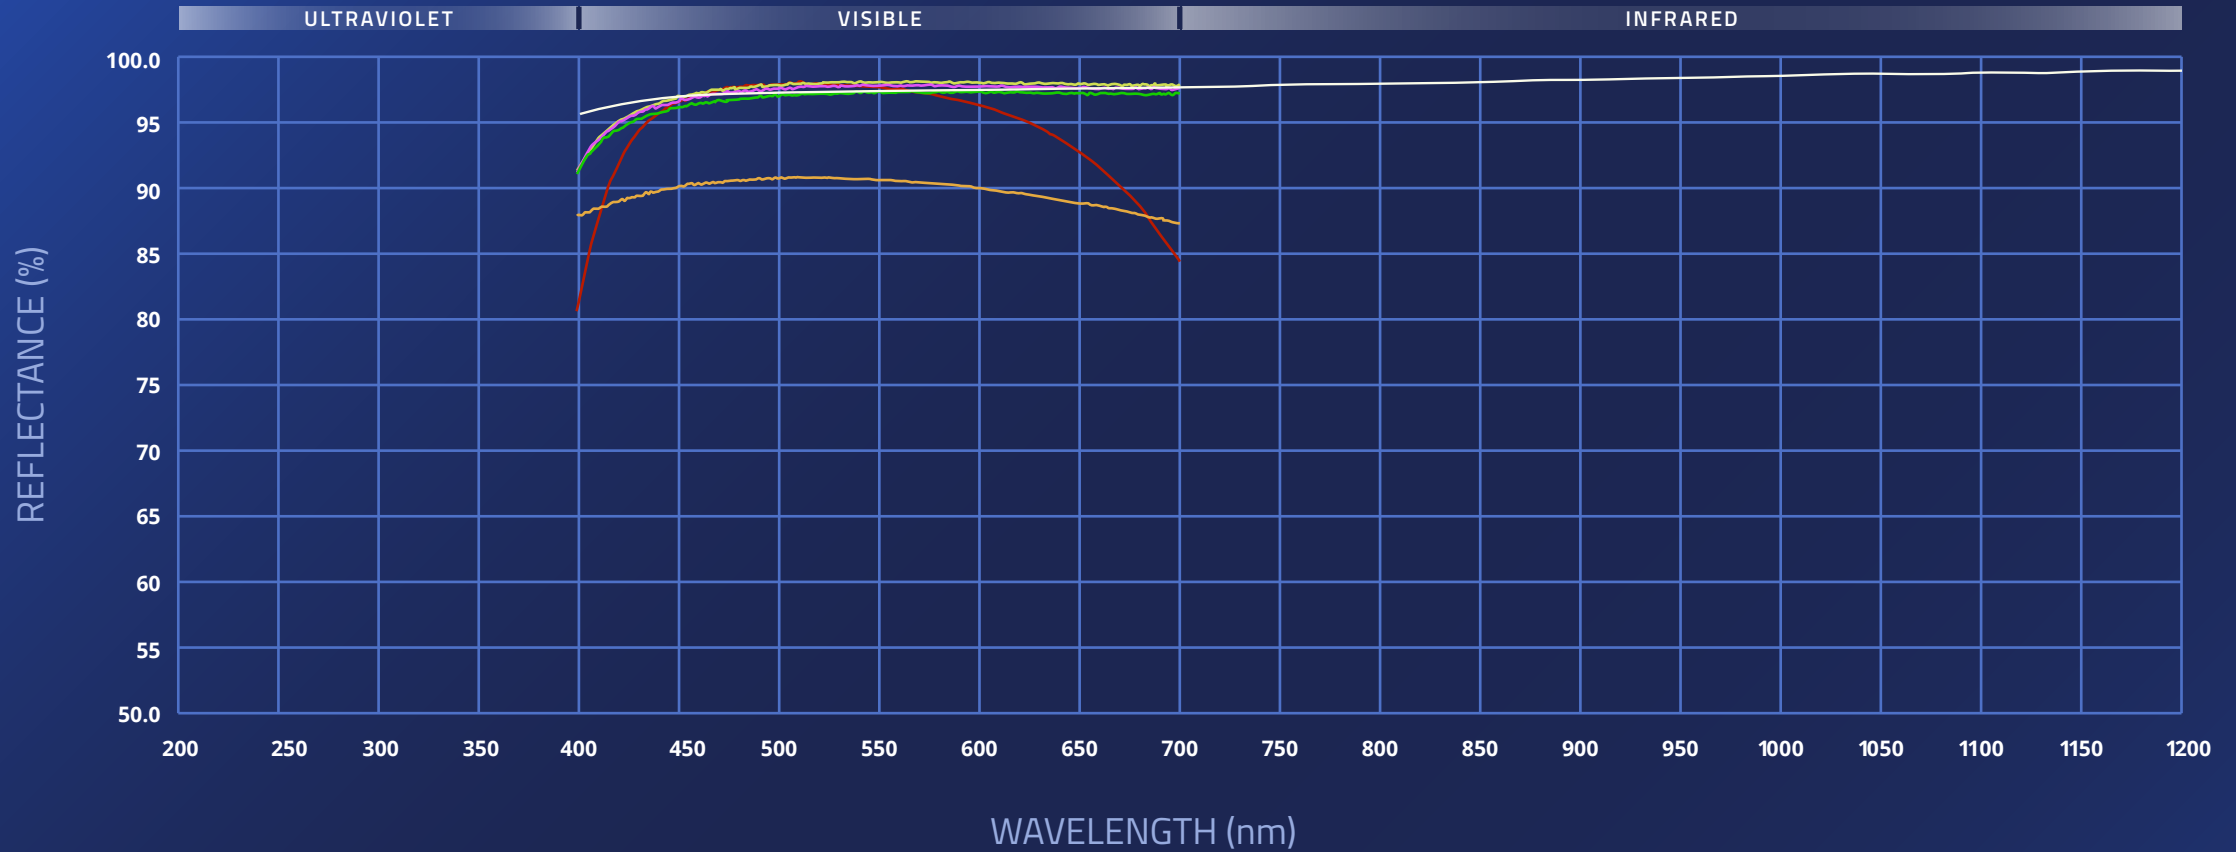


COATING: VISIBLE ENHANCED ALUMINIUM
Ravg > 95.0% @ 450-650nm

COATING: VISIBLE PROTECTED SILVER
Rabs > 94.0% @ 450-650nm
@ 40°
@ 45°
@ 50°

COATING: IR PROTECTED SILVER
Ravg > 85.0% @ 400-500nm
Ravg > 96.0% @ 500-1500nm
Ravg > 97.5% @ 1500-2000nm
(Pages 1-2)


COATING: PROTECTED ALUMINIUM
Ravg > 85.0% @ 400-700nm

Reflectance Curves for Standard Metal Coatings @ 45° AOI, CONTINUED

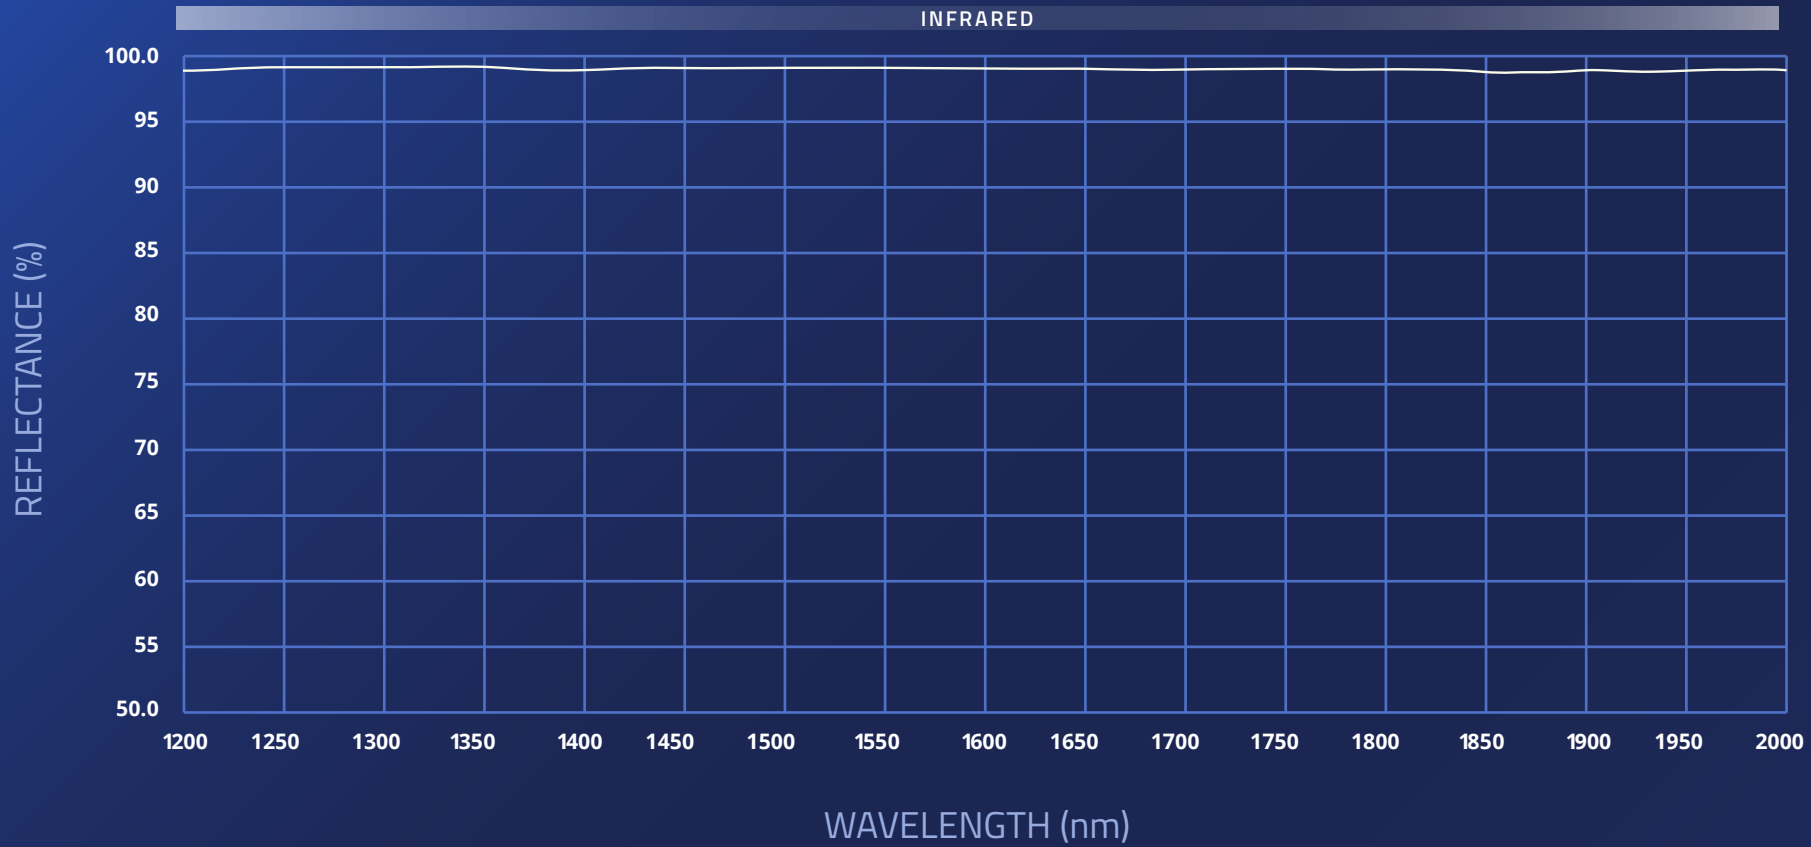

— COATING: IR PROTECTED SILVER
Ravg > 85.0% @ 400–500nm
Ravg > 96.0% @ 500–1500nm
Ravg > 97.5% @ 1500–2000nm
(Pages 1–2)

Reflectance Curves for Standard Metal Coatings @ 45° AOI, CONTINUED

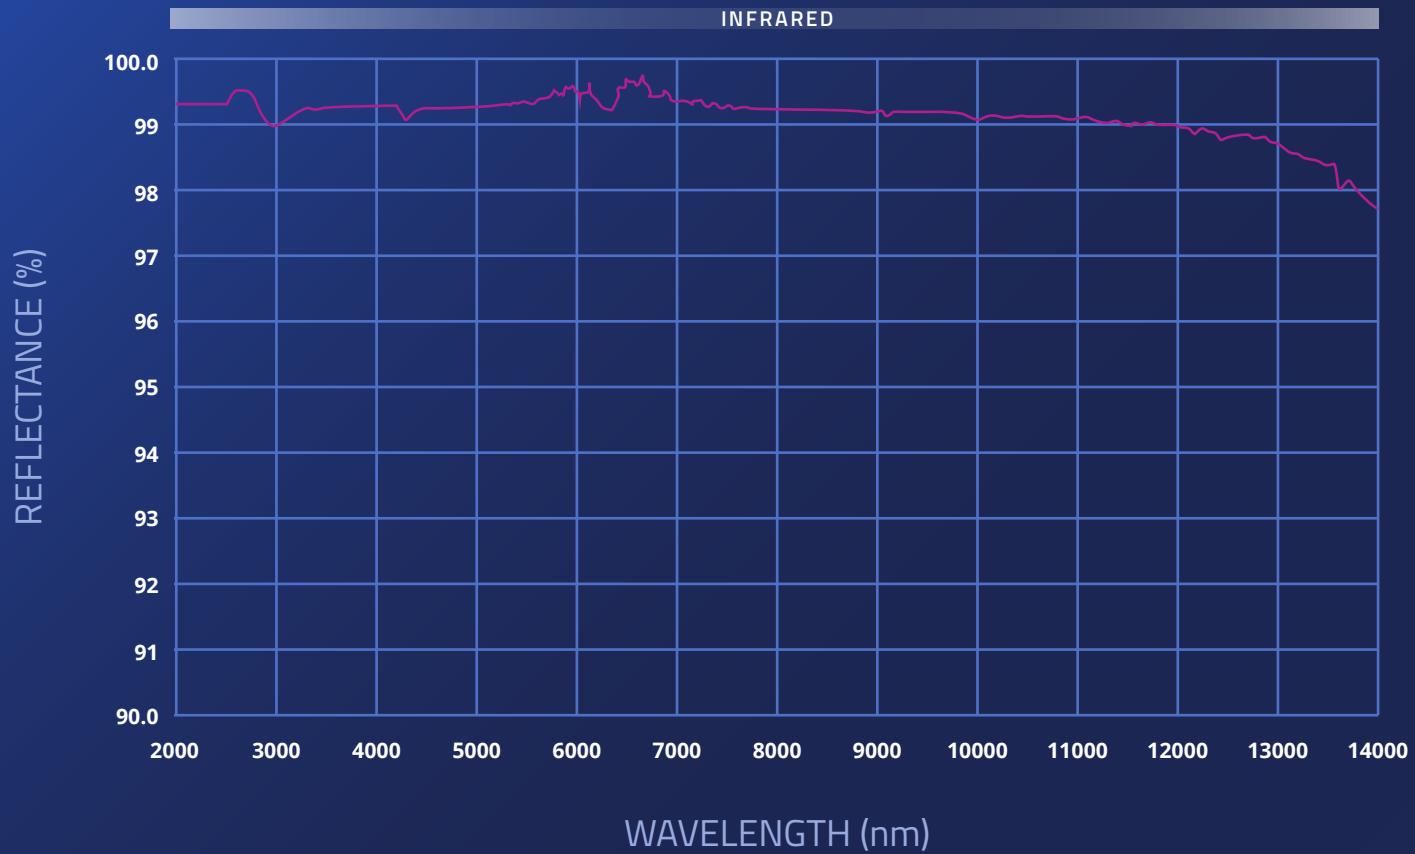

— COATING: IR PROTECTED SILVER
Ravg > 97.5% @ 2000-3000nm
Ravg > 98.0% @ 3000-14000nm